

The Roger Clip-On Mic is a discreet and lightweight microphone with industry leading speech-in-noise and over distance performance.

Worn on a shirt, it is a powerful standalone partner microphone. It includes an audio input for listening to multimedia and TV connectivity, and can also be used together with other Roger microphones, allowing communication between multiple speakers.

Roger Clip-On Mic features


- Proven Roger speech-in-noise performance
- Advanced microphone beamforming
- Audio input for connection to multimedia devices
- Multiple microphone use in a network

What is Roger

Roger is the new digital standard that bridges the understanding gap, in noise and over distance, by wirelessly transmitting the speaker's voice directly to the listener.

Description

- ① On/off/mute
- ② Connect
- ③ Turnable clip
- ④ Indicator light (LED)
- ⑤ Microphone
- Charging and audio input (micro-USB)
- ⑦ Slot for Roger Clip-On Mic
- ③ Audio input (3.5 mm / 1/8 inch jack)
- Charging input (micro-USB)

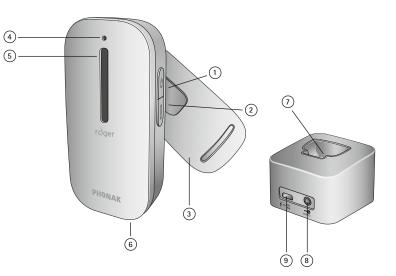



General data

Roger	characteristics	
-------	-----------------	--

Туре:	Roger microphone	Transmission technology:	2.4 GHz including adaptive automatic frequency hopping	
Dimensions (L x W x H):	54 x 25 x 18 mm/2.1 x 1.0 x 0.7 inches			
Mainht		Power emission:	32 mW	
Weight:	18 g / 0.04 lbs	Operating range:	10 meters/33 feet (typical)	
Operating conditions:	Temperature should not exceed the limit values of 0° to +40° Celsius/+32° to +104° Fahrenheit and relative humidity of <95% (non condensing)	- parama (a.g.	20 meters / 66 feet (ideal conditions)	
Transport and storage conditions:	During transport or storage, the temperature should not exceed the limit values of -20° to $+60^{\circ}$ Celsius/ -4° to $+140^{\circ}$ Fahrenheit and relative humidity	Roger system data (Co	Connect)	
	of 90% for a long period	Frequency (Roger microphone to Roger receiver):	2.4 GHz	
Battery:	Type: Lithium Polymer			
	Capacity: 250 mAh Voltage: 3.7 V	Connect operating range:	10 cm / 3.9 inches	
Operating time:	6 hours			
Power supply:	Voltage input: 100–240V Voltage output: 5 VDC/1A Connector: micro-USB Cable length: 1.3 m/4.2 feet	Roger network		
	Cable length. 1.5 m/ 4.2 reet	Compatible Roger receivers:	All personal Roger receivers	
		Number of Roger receivers:	Unlimited Roger receivers (02)	
Microphone characte	eristics		Up to 2 Roger ear-level receivers (03) of 1 Roger MyLink (03)	
		Compatible Roger microphones:	Roger EasyPen and Roger Clip-On Mic	
Microphone:	Array microphone with enhanced Vocie Activity Detector for pick-up at distance of 20 cm or less	Number of Roger microphones:	Up to 10	

Audio characteristics

Audio bandwidth:

100 Hz – 7.3 kHz

Accessories

Docking station:

Charging input (micro-USB) and audio input (3.5 mm / 1/8 inch jack)

Lanyard length:

56 cm / 22 inches

Standards

El. Safety:	
-------------	--

Radiocom 2.4 GHz:

EMC:

IEC/EN 60950-1

EN 300 328

EN 301.489-1,-3,-9,-17